


# PC 21000-30-XL-L

Rodeca Thermolight

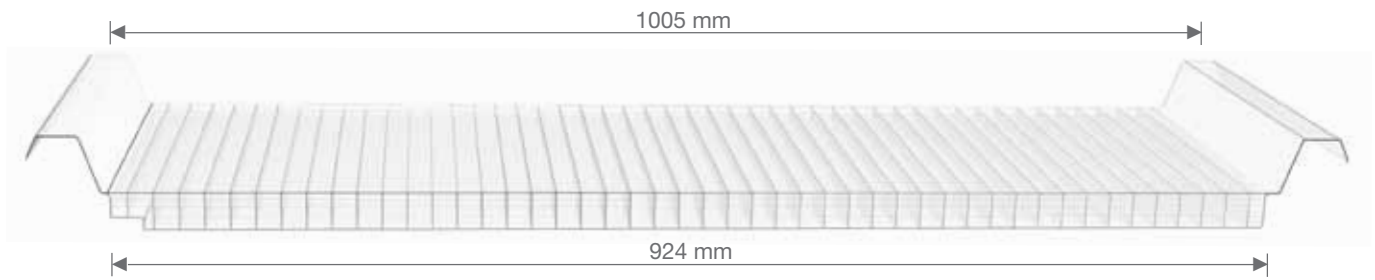

## Product properties

### PC 21000-30-XL

|                             |  |
|-----------------------------|--|
| Building width              | 1005 / 924 mm  |
| Thickness                   | 30 mm +/- 0.5 mm   |
| U <sub>p</sub> -value       | approx. 1.4 W/m <sup>2</sup> K                           |
| Weight                      | approx. 3300 g/running meter                             |
| Structure                   | 6 layers / 5 chambers                                    |
| Flammability classification | B-s1,d0 according to EN 13501                            |
| Light transmission          | light opal approx. 45%* (*in-house measurements)         |
| Versions                    | light opal, Color** (**minimum quantities are necessary) |

Production tolerances see General Information



## Flexible wings

### Adaptation of wings

The lateral wings of panel can be adapted to the used corrugated panels at customers' request.\* Please ask about feasibility in advance. \* Minimum quantities are necessary

