

Rodeca Translucent Building Elements




Product properties

Width: 333 mm $-2/+ 6$ mm
 Thickness: 16 mm $+/- 0.5$ mm
 U_p -value: approx. $2.2 \text{ W/m}^2\text{K}^*$
 Weight: approx. 2.4 kg/m^2
 Layers / chambers: 4 layers / 3 chambers
 Flammability classification: B-s1,d0 according to EN 13501





Colours: crystal and opal
 Standard: All colours similar to RAL available
 Colour: Available from a minimum quantity of 300 m^2 without separate additional costs for colour change.

* U_p -value vertical application

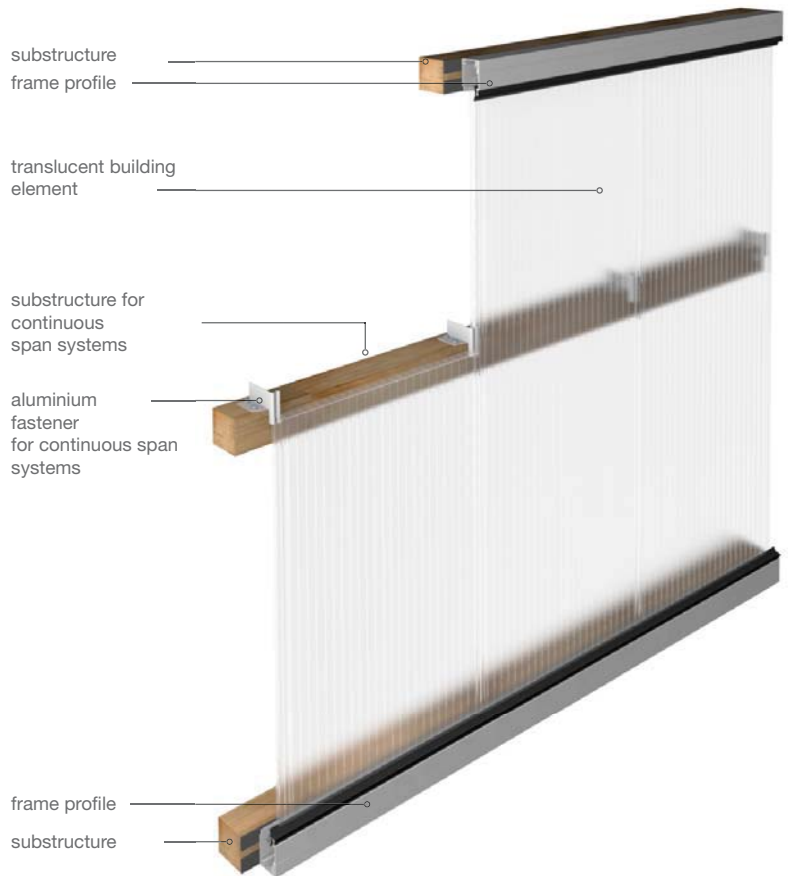


The diagrams below show recommended span widths depending on the type of installation.


The values are only valid in connection with original Rodeca system accessories and may not be used as a substitute for project-related static calculations.

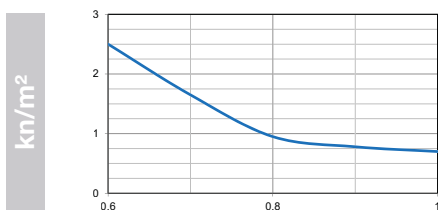

distance A in m

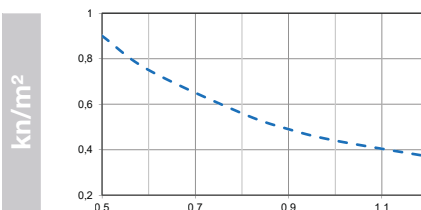

distance A in m

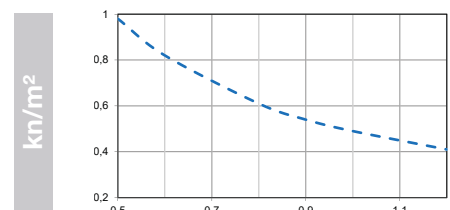

distance A in m

----- fastener