


PC 2540-4 DecoColor



Product properties

Building width	500 mm
Thickness	40 mm
Weight	approx. 4.0 kg/m ²
Structure	4 layers / 3 chambers
U _p -value	1.4 W/m ² K vertical 1.5 W/m ² K horizontal
Sound insulation value	R _w = 20 dB
Flammability classification	B-s1, d0
UV admission	< 1 %, wavelengths until 380 nm stopped almost a 100 %
Coefficient of linear expansion	0.065 mm/m/°C
ETA	19/0452
aBG	Z-10.19-835
BiColor version	Two coloured version of the transparent building elements (inner coloured layer). Standard colours can be delivered without separate surcharges starting from a minimum quantity of 150 m ² - non-standard combinations from 300 m ² .

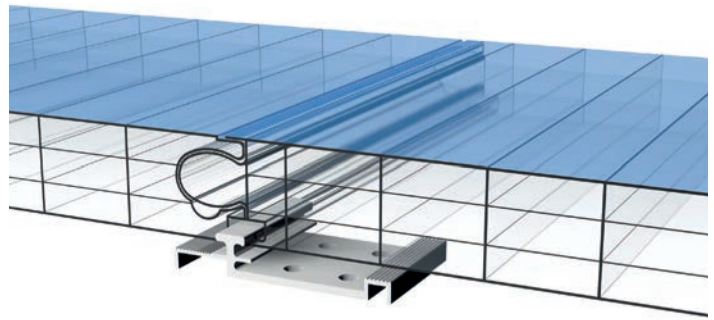





Fasteners

Fastener AF50 (item no.: 49404050)	50 mm height	
Fastener AF100 (item no.: 494040100)	100 mm height	


Production tolerances s. general information

Span charts


The diagrams below show recommended span widths depending on the type of installation. The values are only valid in connection with original Rodeca system accessories and may not be used as a substitute for project-related static calculations.

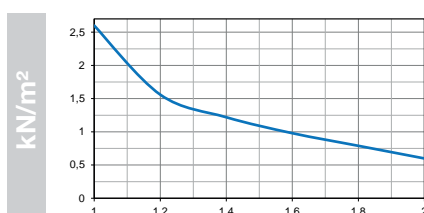

distance A in m

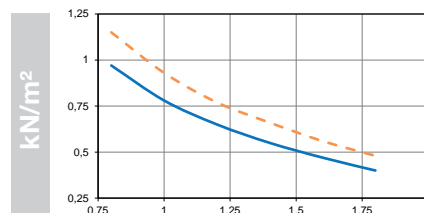

distance A in m

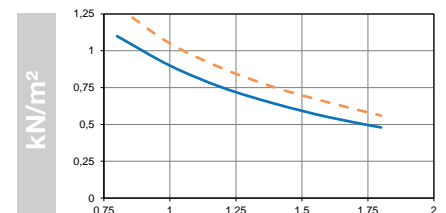

distance A in m