

PC 2540-4



Product properties

Building width	500 mm	
Thickness	40 mm	
Weight	approx. 4.0 kg/m ²	
Structure	4 layers / 3 chambers	
U _p -value	1.4 W/m ² K vertical 1.5 W/m ² K horizontal	
Sound insulation value	R _w = 20 dB	
Flammability classification	B-s1, d0	
Light transmission value	crystal	approx. 63 %
	opal	approx. 28 %
Solar gain value g	crystal	approx. 61 %
	opal	approx. 42 %
UV admission	< 1 %, wavelengths until 380 nm stopped almost a 100 %	
Coefficient of linear expansion	0.065 mm/m/°C	
ETA	19/0452	
aBG	Z-10.19-835	
Standard colours	crystal and opal	

Production tolerances s. general information





Fastener



Fastener AF50 (item no.: 49404050)	50 mm height	
Fastener AF100 (item no.: 494040100)	100 mm height	

Span charts



The diagrams below show recommended span widths depending on the type of installation. The values are only valid in connection with original Rodeca system accessories and may not be used as a substitute for project-related static calculations.

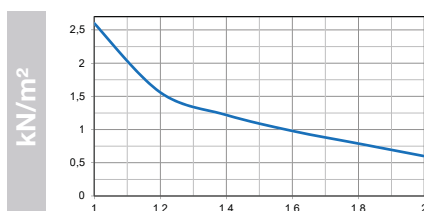

distance A in m

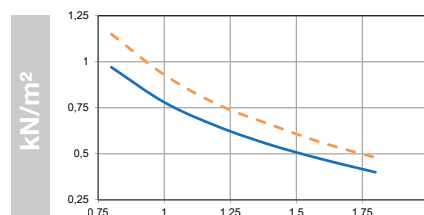


distance A in m

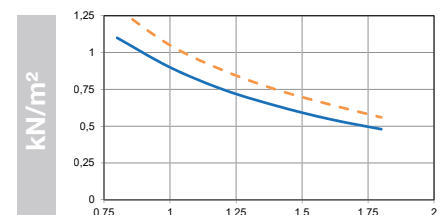


distance A in m

PC 2540-4 BiColor

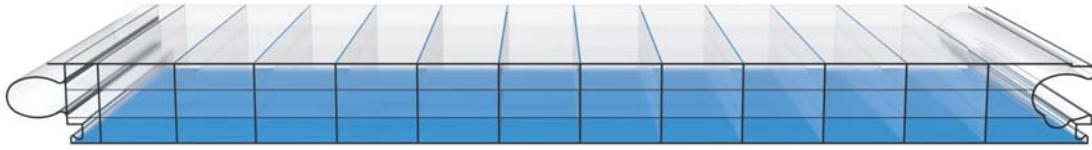

Product properties

Building width	500 mm
Thickness	40 mm
Weight	approx. 4.0 kg/m ²
Structure	4 layers / 3 chambers
U _p -value	1.4 W/m ² K vertical 1.5 W/m ² K horizontal
Sound insulation value	R _w = 20 dB
Flammability classification	B-s1, d0
UV admission	< 1 %, wavelengths until 380 nm stopped almost a 100 %
Coefficient of linear expansion	0.065 mm/m/°C
ETA	19/0452
aBG	Z-10.19-835
BiColor version	Two coloured version of the transparent building elements (inner coloured layer). Standard colours can be delivered without separate surcharges starting from a minimum quantity of 150 m ² - non-standard combinations from 300 m ² .

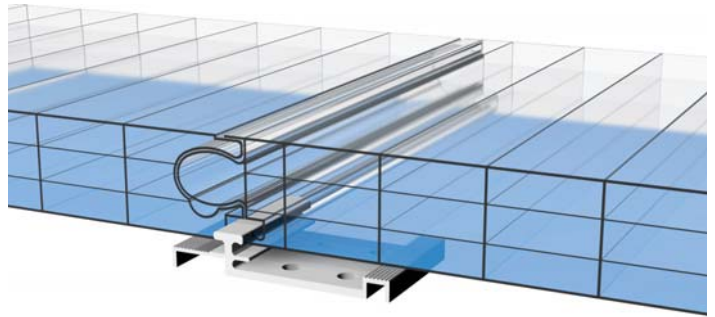



Fasteners

Fastener AF50 (item no.: 49404050)	50 mm height	
Fastener AF100 (item no.: 494040100)	100 mm height	


Production tolerances s. general information

Span charts



The diagrams below show recommended span widths depending on the type of installation. The values are only valid in connection with original Rodeca system accessories and may not be used as a substitute for project-related static calculations.

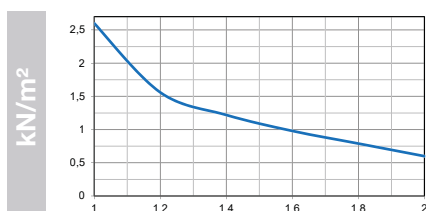

distance A in m

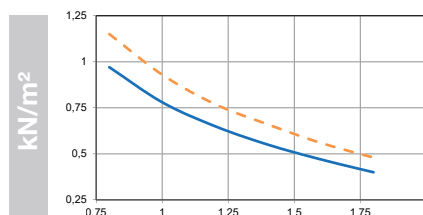

distance A in m

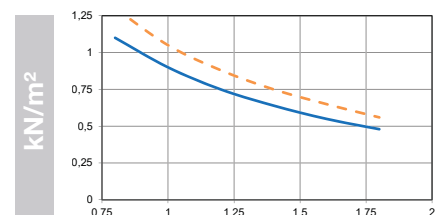


distance A in m

PC 2540-4 DecoColor




Product properties

Building width	500 mm
Thickness	40 mm
Weight	approx. 4.0 kg/m ²
Structure	4 layers / 3 chambers
U _p -value	1.4 W/m ² K vertical 1.5 W/m ² K horizontal
Sound insulation value	R _w = 20 dB
Flammability classification	B-s1, d0
UV admission	< 1 %, wavelengths until 380 nm stopped almost a 100 %
Coefficient of linear expansion	0.065 mm/m/°C
ETA	19/0452
aBG	Z-10.19-835
BiColor version	Two coloured version of the transparent building elements (inner coloured layer). Standard colours can be delivered without separate surcharges starting from a minimum quantity of 150 m ² - non-standard combinations from 300 m ² .

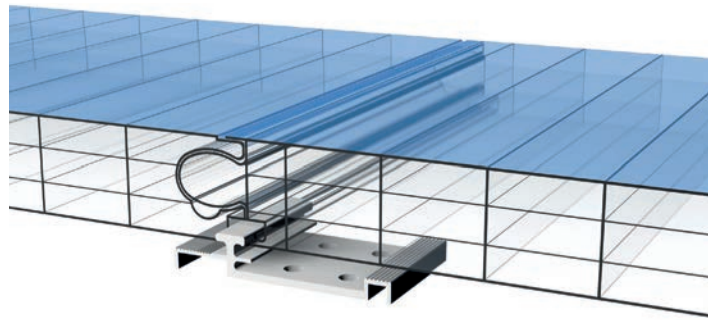





Fasteners

Fastener AF50 (item no.: 49404050)	50 mm height	
Fastener AF100 (item no.: 494040100)	100 mm height	


Production tolerances s. general information

Span charts


The diagrams below show recommended span widths depending on the type of installation. The values are only valid in connection with original Rodeca system accessories and may not be used as a substitute for project-related static calculations.

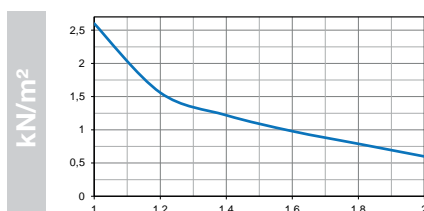

distance A in m

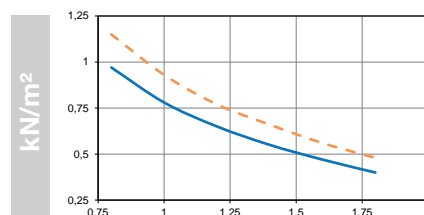

distance A in m

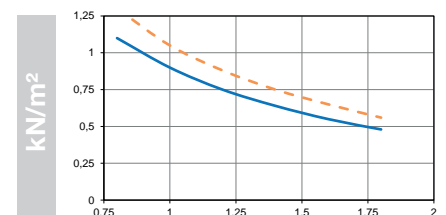

distance A in m

Overview TBE 40-60mm

PC 2540-4



Width: 500 mm
Thickness: 40 mm
Up-value: 1.4 W/m²K*
Colours: crystal / opal / BiColor

PC 2540-4-MC



Width: 500 mm
Thickness: 40 mm
Up-value: 1.5 W/m²K*
Colours: crystal / opal

PC 2540-6




Width: 500 mm
Thickness: 40 mm
Up-value: 1.2 W/m²K*
Colours: crystal / opal
Color / DecoStripe

PC 2540-7



Width: 500 mm
Thickness: 40 mm
Up-value: 1.1 W/m²K*
Colours: crystal / opal
DecoColor

PC 2540-10



Width: 500 mm
Thickness: 40 mm
Up-value: 1.0 W/m²K*
Colours: crystal / opal
Color

PC 2540-10 DX - PC 2540-10 DX HI



Width: 495 mm
Thickness: 40 mm
Up-value: 1.1 W/m²K*
Colours: crystal / opal
DuoColor

PC 2550-10




Width: 495 mm
Thickness: 50 mm
Up-value: 0.9 W/m²K*
Colours: crystal / opal
Color / DuoColor

PC 2560-12



Width: 500 mm
Thickness: 60 mm
Up-value: 0.75 W/m²K*
Colours: crystal / opal
Color / DuoColor

*U_p-Value vertical application

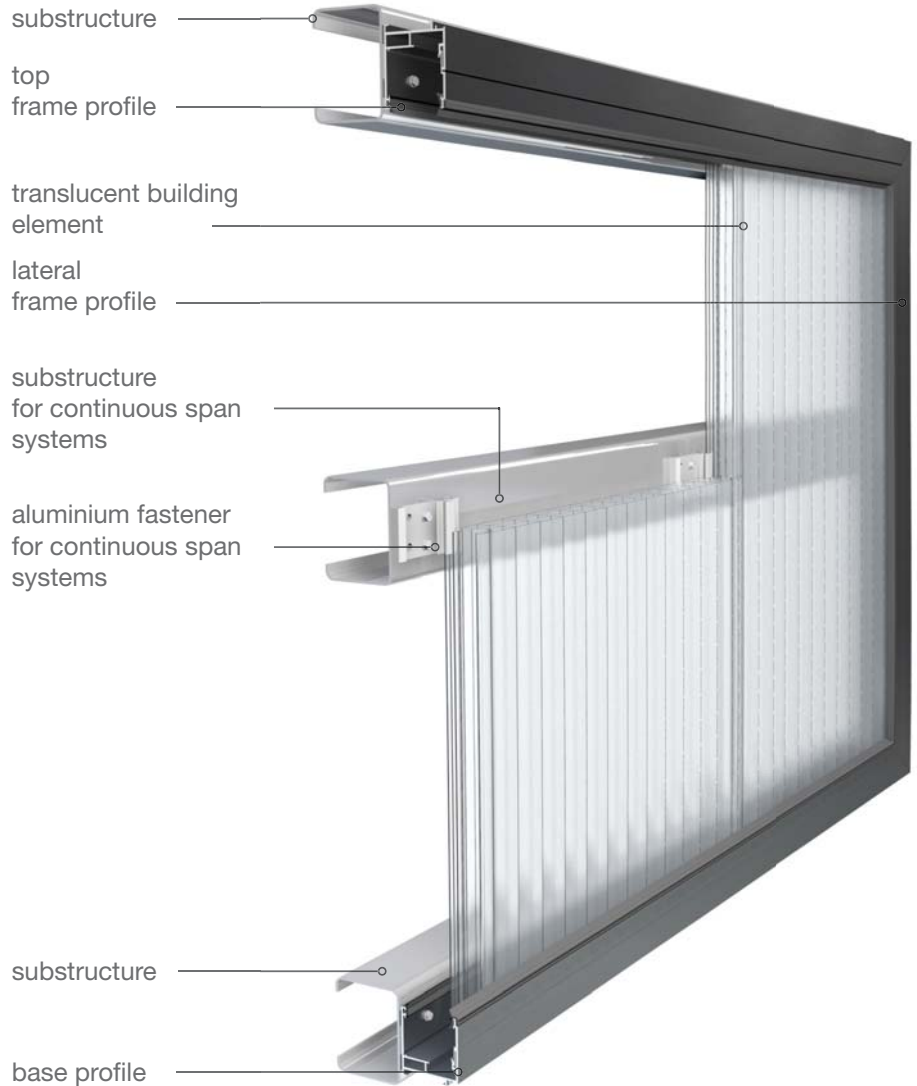

Mounting situations

Depending on structural conditions, translucent building elements can be installed with or without aluminium fasteners in reveal, as rainscreen, or as pitched rainscreen with a minimum inclination of 15° from horizontal.



Installation in reveal



Rainscreen installation



Pitched rainscreen installation