


Rodeca Thermolight



Product properties

PC 2685-3	
Building width	600 mm
Thickness	40 / 85 mm
U _p -value	approx. 1.6 W/m ² K
Weight	approx. 5.2 kg/m ²
Structure	corpus 3 layers / 2 chambers corrugation 4 layers / 3 chambers
Flammability classification	B-s1,d0 according to EN 13501
Light transmission	crystal approx. 55%* (* in-house measurements)
Versions	crystal, Color** (** minimum quantities are necessary)

Production tolerances see general information

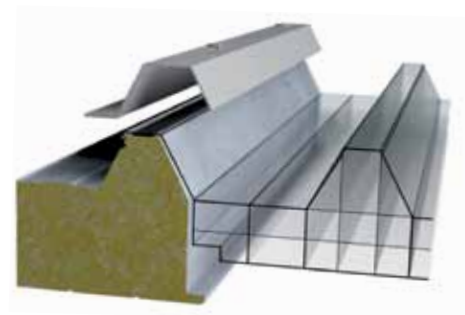

System

