
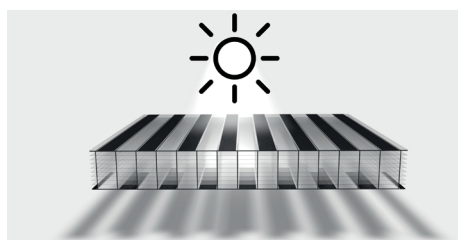
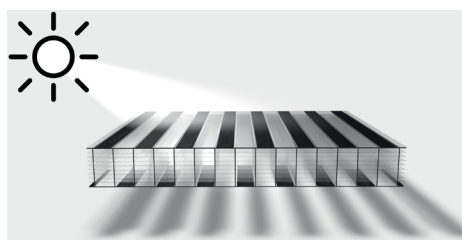


## Technical Data Sheet

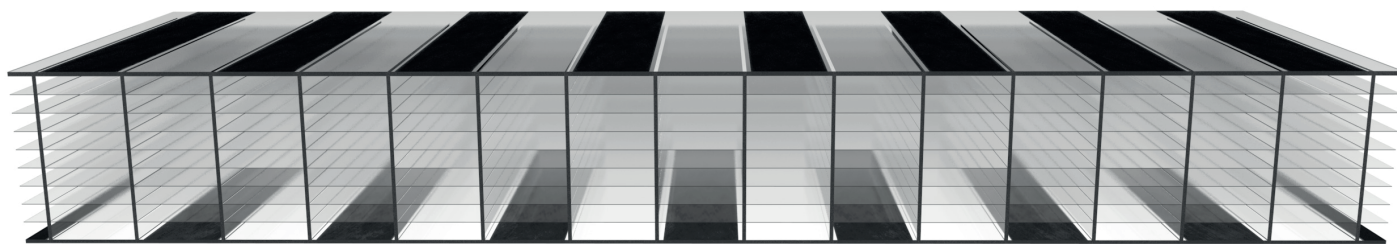


The multi wall sheet PC 32-10 DecoStripe is another result of the innovative and high-performance extrusion technology of **RODECA**. The main body is clear and the outer shells are provided with broad shading lines. This technique offers both a shading and a unique design effect. The stripes introduced into the multi wall sheet during extrusion can be colored according to customer requirements.

## Rodeca Multi Wall Sheets

### Product properties

Building width	standard width 1230 mm** variable width 700 mm - 1230 mm**
Thickness	32 mm
Weight	approx. 3600 g/m <sup>2</sup>
Structure	10 layers / 9 chamber
Up-Value	1,2 W/m <sup>2</sup> K vertical / horizontal
Flammability classification	B-s1, d0
Production tolerances	EN 16153
Light transmission values	clear - stripes white opaque approx. 30%* clear - stripes black mat approx. 1%*
UV-protection	coextruded UV-protective layer on external wall
Coefficient of linear expansion	0,065 mm/m/°C
Colours	(on request**)

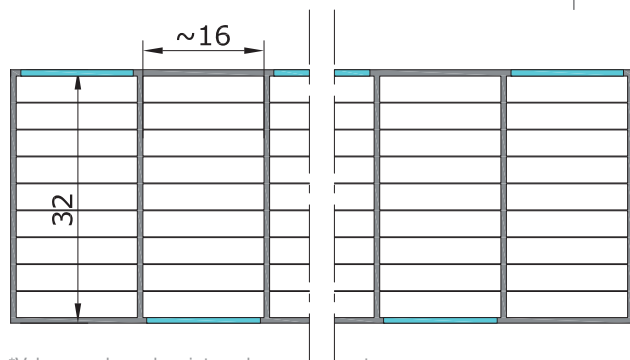

\*Values are based on internal measurements

\*\*Minimum quantities are mandatory



RODECA Products are CE-marked and tested according to different criteria. The products are monitored by own laboratory and quality assurances. Please consider that multi wall sheets have to be CE-marked according to product standard EN 16153. However, the CE-marking of multi wall sheets does not replace the requirements of usability proofs in connection with associated building codes / building regulations. These must be mandatorily considered from planner / installer and, if necessary, a corresponding proof of usability must be provided by customer. Data subject to change.