


## Rodeca Thermolight

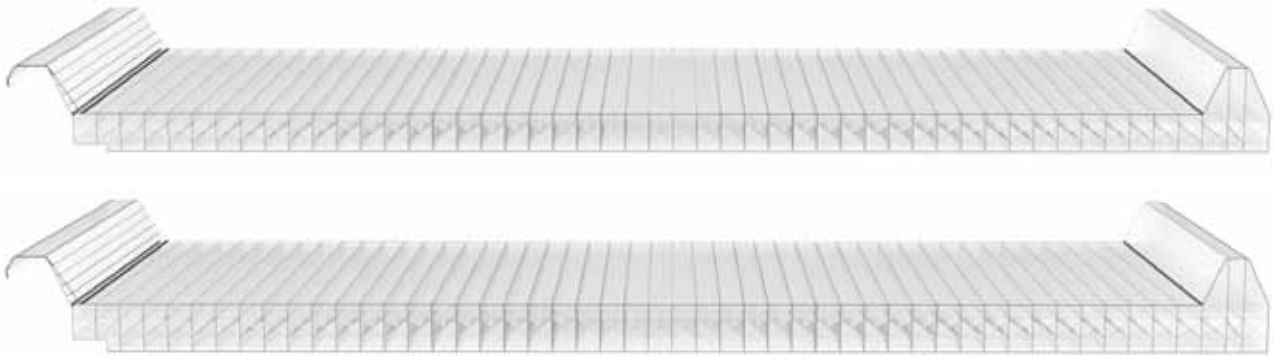


## Product properties

	PLP 1000-30	PLP 1000-40
Building width	1000 mm	1000 mm
Thickness	30 mm	40 mm
Weight	approx. 3.5 kg/m <sup>2</sup>	approx. 3.9 kg/m <sup>2</sup>
Structure	X-structure / 7 layers	X-structure / 7 layers
U <sub>p</sub> -value	approx. 1.3 W/m <sup>2</sup> K	approx. 1.1 W/m <sup>2</sup> K
Flammability classification	B-s1, d0 according to EN 13501	B-s1, d0 according to EN 13501
Light transmission	light opal approx. 43%	light opal approx. 38%
Standard version	light opal	light opal

Production tolerances see general information

Metal plates  
and fixations on site

Corrugated panels

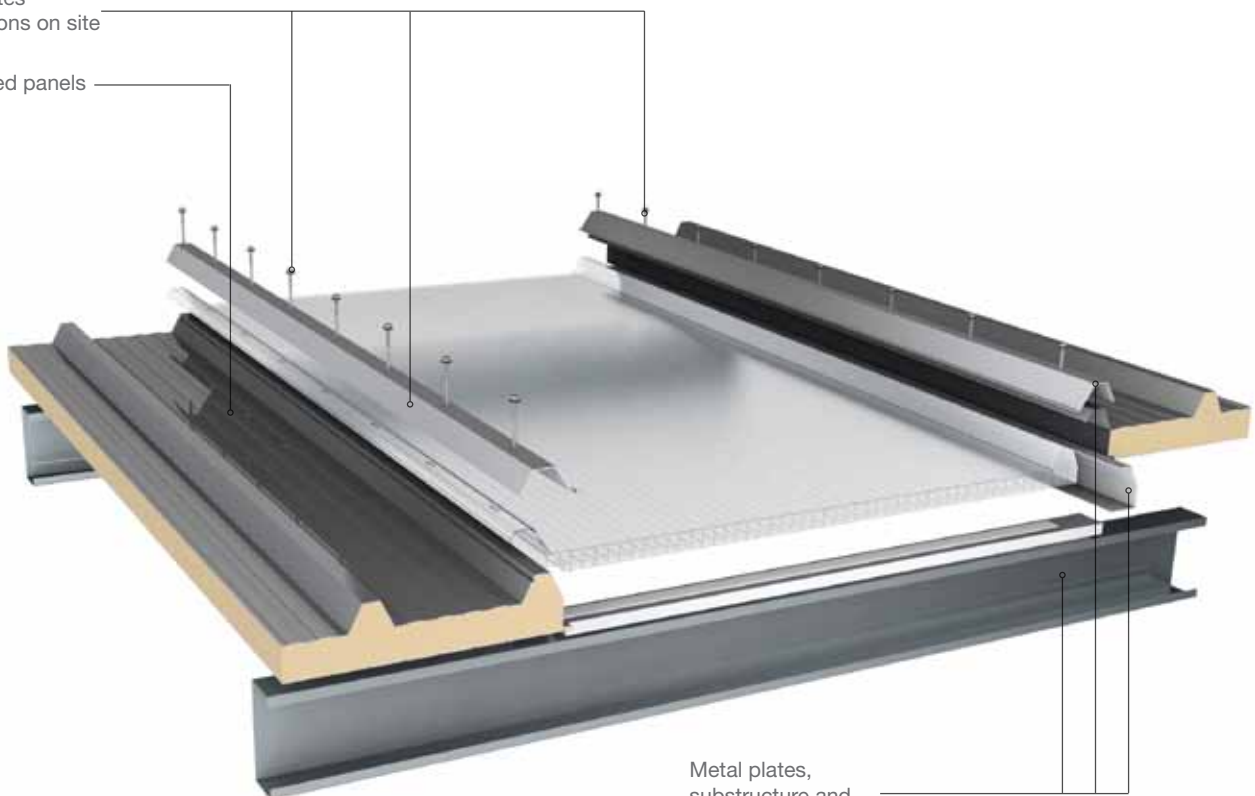

Metal plates,  
substructure and  
fixations on site